


ASSEMBLY INSTRUCTION – No. 1278 TIRE RACK

CAREFULLY EXAMINE THE ILLUSTRATION AND READ THROUGH THESE INSTRUCTIONS BEFORE BEGINNING ASSEMBLY, THEN PROCEED AS FOLLOWS:

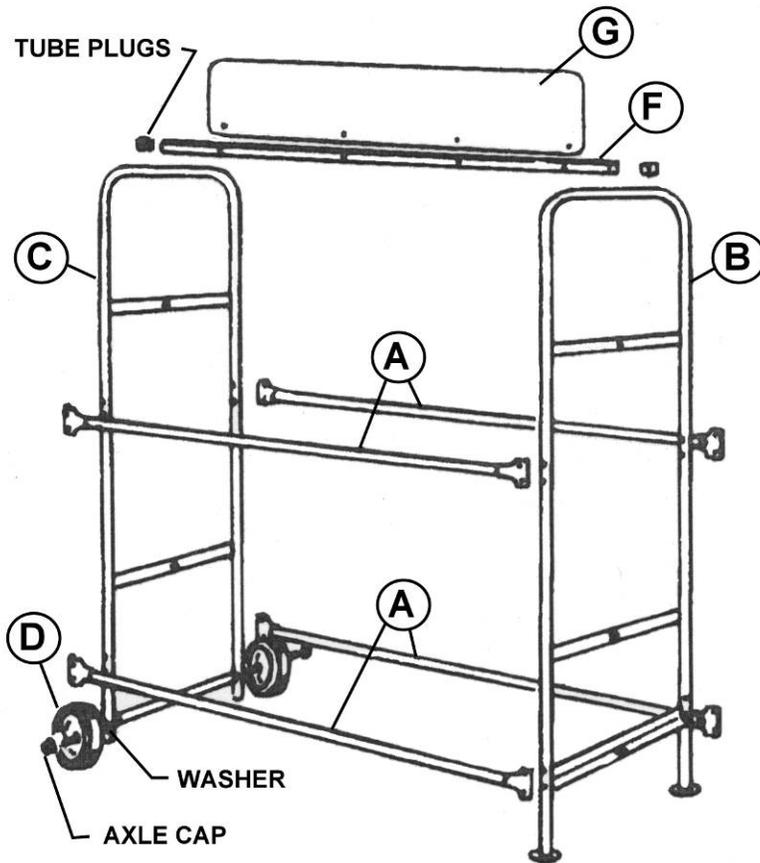

- (1) Fasten Rails (A) to Frames (B) and (C); attach nuts but do not tighten. Make sure the angle at lower end of Frame (B) faces out as shown in drawing.
- (2) Apply an Axle Cap securely on one end of Axle (D). Put a wheel on the Axle with the recessed side of hub next to the Axle Cap. Put a washer over the Axle and slide it through the Axle Cover in Frame (C). Place the other washer and wheel on the Axle. **MAKE SURE** both wheels have the protruding side of hub toward the Frame, then attach the other Axle Cap.

NOTE: Your order may have called for a swinging sign; if so, follow the instructions for that assembly to install the swinging sign, and then go to Step (4) below. If your order called for the stand-up sign as shown here, proceed with Step (3) below.

- (3) Insert Tube Plugs into ends of Sign Bar (F) and fasten Sign (G) to the Sign Bar, using the four small bolts and nuts provided. Place this assembly on top of Frames, fastening with the two remaining bolts and nuts.
- (4) With the rack standing on a level surface, **TIGHTEN ALL FASTENERS**.
- (5) If your rack has been ordered with the optional Locking System, install as follows after your display tires have been placed on the rack:

Insert straight ends of Locking Bars through keyhole slots in the crossbars at one end of rack, then run through each tier of tires and corresponding slots at the other end. Rotate lower bar up so the slots in both bars are together, then secure with padlock.

In case of parts shortage or defects, describe missing or defective part by name and letter as used in these instructions, and report to the manufacturer:

WARREN STEEL SPECIALTIES CORPORATION
P.O. Box 1391 Warren, OH 44482
(330) 399-8360